


# Module 12 IP68 in-ground

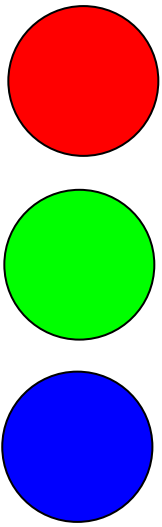

Featuring the new  
Easy-Link™ System!

The latest version of the Module 12 in-ground features the new Module 12 Easy-Link™ and a more compact housing, as well as an upgraded rating of IP68, to deliver a luminaire suitable for all exterior applications.

It still offers the same variety of optics and endless colour-changing as the interior version, whilst the versatile bracket allows the unit to be tilted and swivelled in any direction, to the exact angle required by the project. Furthermore the fixture is supplied with an installation shield for ease of fitting during ground works.

Single colour versions available:

- Red
- Green
- Blue
- Amber
- o Cool white
- o Warm white

Optics available:

- 25°
- oval (25°x8°)



4.8 Watts Green  
4.8 Watts Blue  
4.0 Watts Red

Maximum input current: 350 mA per LED



Max operating temperature : +70°C  
Operating ambient temperature : -20° to +55°C  
Lamp life @ 50°C : 50,000 hours






2Kg



© Tryka L.E.D Ltd 2006 – Unit 3 Station Works – Shepreth – Nr Royston – Herts SG8 6PZ – UK  
☎ +44 (0)1763 260666 📠 +44 (0)1763 260700 🌐 www.tryka.com

As part of our continuous product development we reserve the right to amend these specifications without prior notice.

# Module 12 IP68 in-ground




## Mechanical

### Fixture

- Body : Die cast Aluminium
- Window : Clear toughened glass
- Ceiling : High grade stainless steel
- Cable Entry : 2 off cable gland
- Connection: : RJ45 loop in and out









# Module 12 IP68 in-ground



The unit is supplied ready to install; however installation instructions can be obtained from Tryka L.E.D. Ltd if required.

The diagram below shows how all the components are fitted together to deliver an outstanding IP68 in-ground fixture:

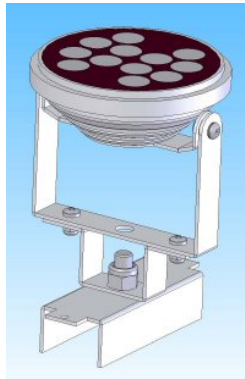

## Part number

TRY-RGB-IG12-25

TRY-RGB-IG12-OV

## Description

Module 12 Easy-Link™ RGB IP68 in-ground with 25° optics

Module 12 Easy-Link™ RGB IP68 in-ground with oval optics

Tryka L.E.D. Ltd is a Certified Member of the Luxeon Lighting Network™



3



© Tryka L.E.D Ltd 2006 – Unit 3 Station Works – Shepreth – Nr Royston – Herts SG8 6PZ – UK

☎ +44 (0)1763 260666 📠 +44 (0)1763 260700 🌐 www.tryka.com

As part of our continuous product development we reserve the right to amend these specifications without prior notice.