


Module 1 Dome, Flush & Eye-Flush

IP rated for outdoor use!



Interior Series

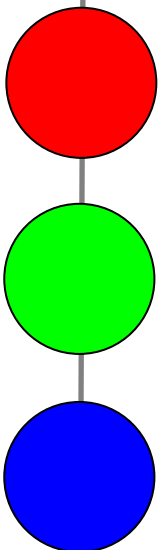

Product Overview

The Module 1 Dome, Module 1 Flush and Module 1 Eye-Flush are ultra compact light sources containing a single colour L.E.D. ideal for column lighting, drawing attention to a specific feature and more.

The IP65 rating makes them also suitable for certain outdoor applications.

Their compact size and high brightness mean the units can be easily used as an addition to existing lighting projects or as part of a new design, all to great effect.

Features

- Very long operating life in excess of 50,000 hours
- Range of L.E.D. colours available
- Ultra compact design
- IP65 rating
- Low energy consumption
- Cool beam safe to touch
- No ultra-violet radiation
- Easy to install with modular wiring system
- Optimised thermal management


Selection Guide

Part Numbers: M1-D-Y (Module 1 Dome); M1-F-Y (Module 1 Flush); M1-EF-Y (Module 1 Eye-Flush)


	Y =	Colour	Colour temp. or dominant wavelength	Luminous Flux typical (Lm)
	WW	Warm White	3300K	20
	W	White	5500K	25
	B	Blue	455nm	150mW
	G	Green	530nm	30
	R	Red	627nm	44
	A	Amber	590nm	36

Interior Series

Dimensions for Module 1 Dome

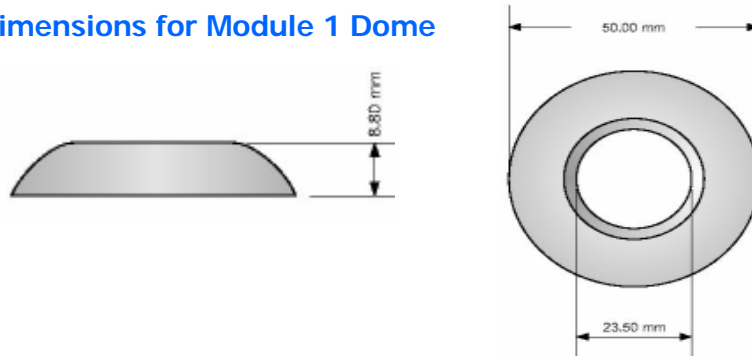

Dimensions for Module 1 Flush

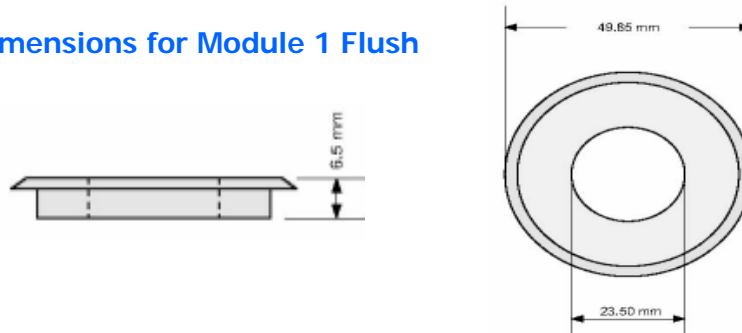

Dimensions for Module 1 Eye-Flush



Suitable Drivers

TM-DE3 Micro Driver 3 to run up to 3 Module 1s

TM-DE9 Micro Driver 9 to run up to 9 Module 1s – requires potentiometer for dimming

TC-CD36 Modulation Driver to run up to 36 Module 1s in DMX mode



Tryka L.E.D. Ltd is a Certified Member of the Luxicon Lighting Network™ CERTIFIED

© Tryka L.E.D. Ltd 2004 – Unit 3 Station Works – Shepreth – Nr Royston – Herts SG8 6PZ – UK

☎ +44 (0)1763 260666 📠 +44 (0)1763 260700 🌐 www.tryka.com

As part of our continuous product development we reserve the right to amend these specifications without prior notice.